

Non-slip Glass Flooring

Custom laminated glass printed with P5 rated non-slip coating



Our non-slip glass flooring is manufactured using a highly abrasive coating that is fused into the glass during the toughening process. This coating forms a permanent, P5 rated non-slip surface that is approved under AS 4586:2013 and AS/NZS 4663:2004 for internal or external pedestrian use, in wet or dry conditions.

Glass thickness and makeup for flooring applications is dependant on application and engineering requirements. Common thicknesses include 17.52mm, 21.52mm & 31.52mm.

FEATURES

Highly slip resistant, abrasive coating

P5 rated for internal or external use

Available in white, black or satin colours

10 year warranty against surface deterioration

Can be applied to clear or tinted glass

MAXIMUM SIZE


700 x 1500mm

MIN SIZE


300x300mm

PATTERN DETAILS

2.5mm dia dots, 50% coverage.



Pattern shown at 100% scale when this page is printed at A4 scale.

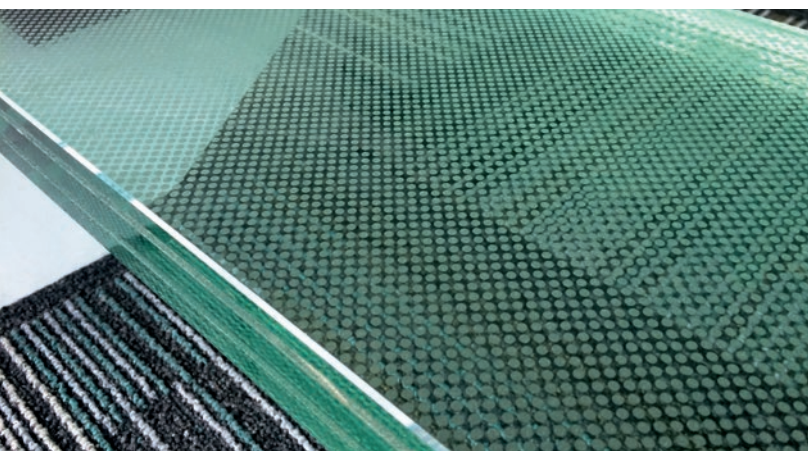

ABOVE: Satin finish non-slip treatment on triple laminate glass stair treads.

To discuss your non-slip glass flooring requirements further, please call us on (08) 6104 1777 or email info@coolingbros.com.au


Cooling Brothers
GLASS COMPANY

www.coolingbros.com.au