


Tempest Guard™ provides cyclonic protection for glass windows and doors located in Australia's most storm prone areas.

Tempest Guard™ Cyclonic Glass consists of a toughened laminate makeup, incorporating specialised structural interlayers to achieve the extreme glass strength that is required in cyclonic regions. Tempest Guard has been successfully tested at speeds of up to 40mps as detailed in AS/NZS1170.2. Testing includes the following:

- a) The cyclonic impact test of a 4kg piece of timber;
- b) An 8mm steel ball, both travelling at 40mps.

Tempest Guard must be installed in an approved cyclonic framing system to ensure full compliance with AS/NZ1170.2. Tempest Guard is available in various combinations of glass, thickness, colours and shapes. For a Tempest Guard solution tailored to suit your requirements, please call us on (08) 6104 1777, and ask to speak with a glass consultant.

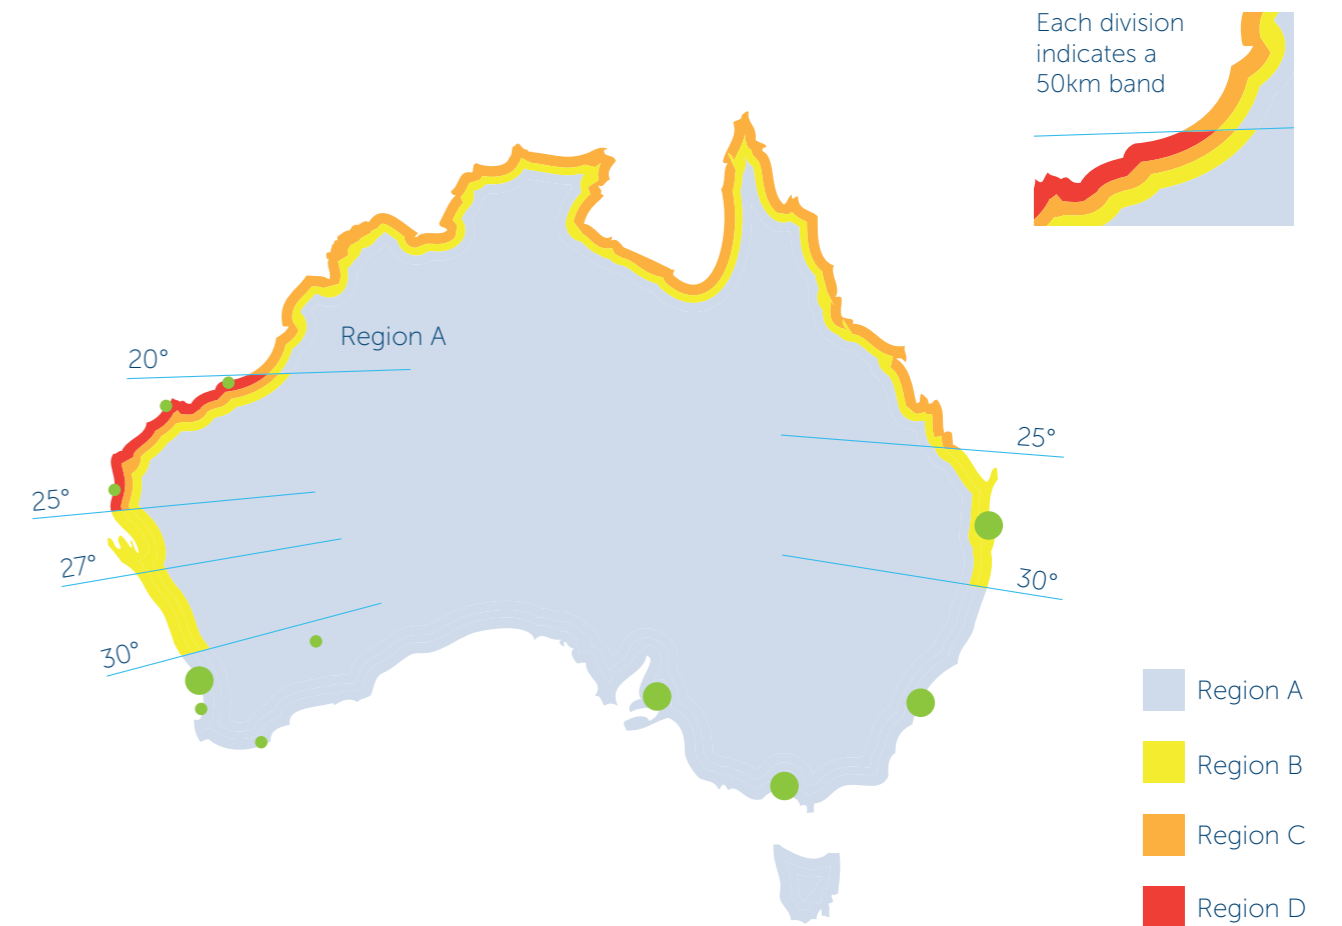

FEATURES

- Tested and certified to AS1170.2 / 40 m/s
- Remains a permanent barrier after impact
- Eliminates the need for storm shutters
- Provides additional UV, sound insulation and security
- Available in Low E configurations

APPLICATIONS

- Commercial and residential projects located in areas subject to frequent cyclones and storms

GLASS TYPES

- Clear
- Tinted
- Low Iron
- Low E

