



# VETROSTAX<sup>®</sup>

## FRAMELESS STACKING DOORS

VetroStax Doors provide weather resistant glass walls, utilising a frameless glass configuration to maximise vision and space.

The VetroStax Door system is the perfect complement to the design of any commercial or residential project and sets a new benchmark for glass wall design. The elegant simplicity of this product delivers uninterrupted views and a sophisticated architectural style.

Providing a unique way of enjoying the outside lifestyle indoors, the VetroStax Door system is top supported with structural headwork. VetroStax are available in a variety of stacking arrangements, designed to maximise available space with a minimal footprint.





### FEATURES

- Tapered look and distinctive, clean, sharp lines
- 90x40mm rail top and bottom, mechanically fixed to glass for strength and rigidity
- Suitable for 10 to 15mm glass
- Anodised or powder coated finishes
- Maximum 150kg per leaf

### MAXIMUM SIZE

Depending On Application

### THICKNESS


10mm to 15mm

### GLASS TYPES

Clear Tinted Low E Low Iron Laminate

## STACKING CONFIGURATIONS

A feature of VetroStax Doors is the design flexibility of track layout. Some typical layouts are shown below, however there are many others available.

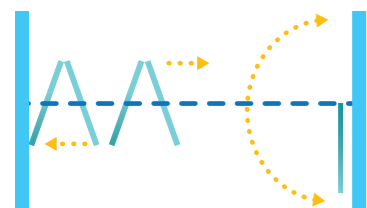


### CENTRE STACK

- Single trolley suspension folding panels hinged in 'floating pairs'
- Single track keeps overhead support simple
- Panels stack 50% inside and 50% outside
- Floor guide recommended
- Stack internally or externally
- Maximum 2 pairs hinged




### END FOLD

- Single trolley suspension with hinged folding panels.
- Single track keeps overhead support simple
- Panels stack perpendicular to the main track
- Floor guide is required
- Stack internally or externally
- Maximum 6 leaf hinged

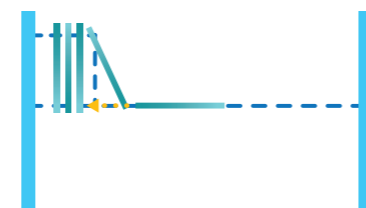

### SIDE STACK

- Dual trolley suspension with individual sliding panels
- High weight capability
- Stack internally or externally
- Panels stack perpendicular to the main track
- No floor guide is required

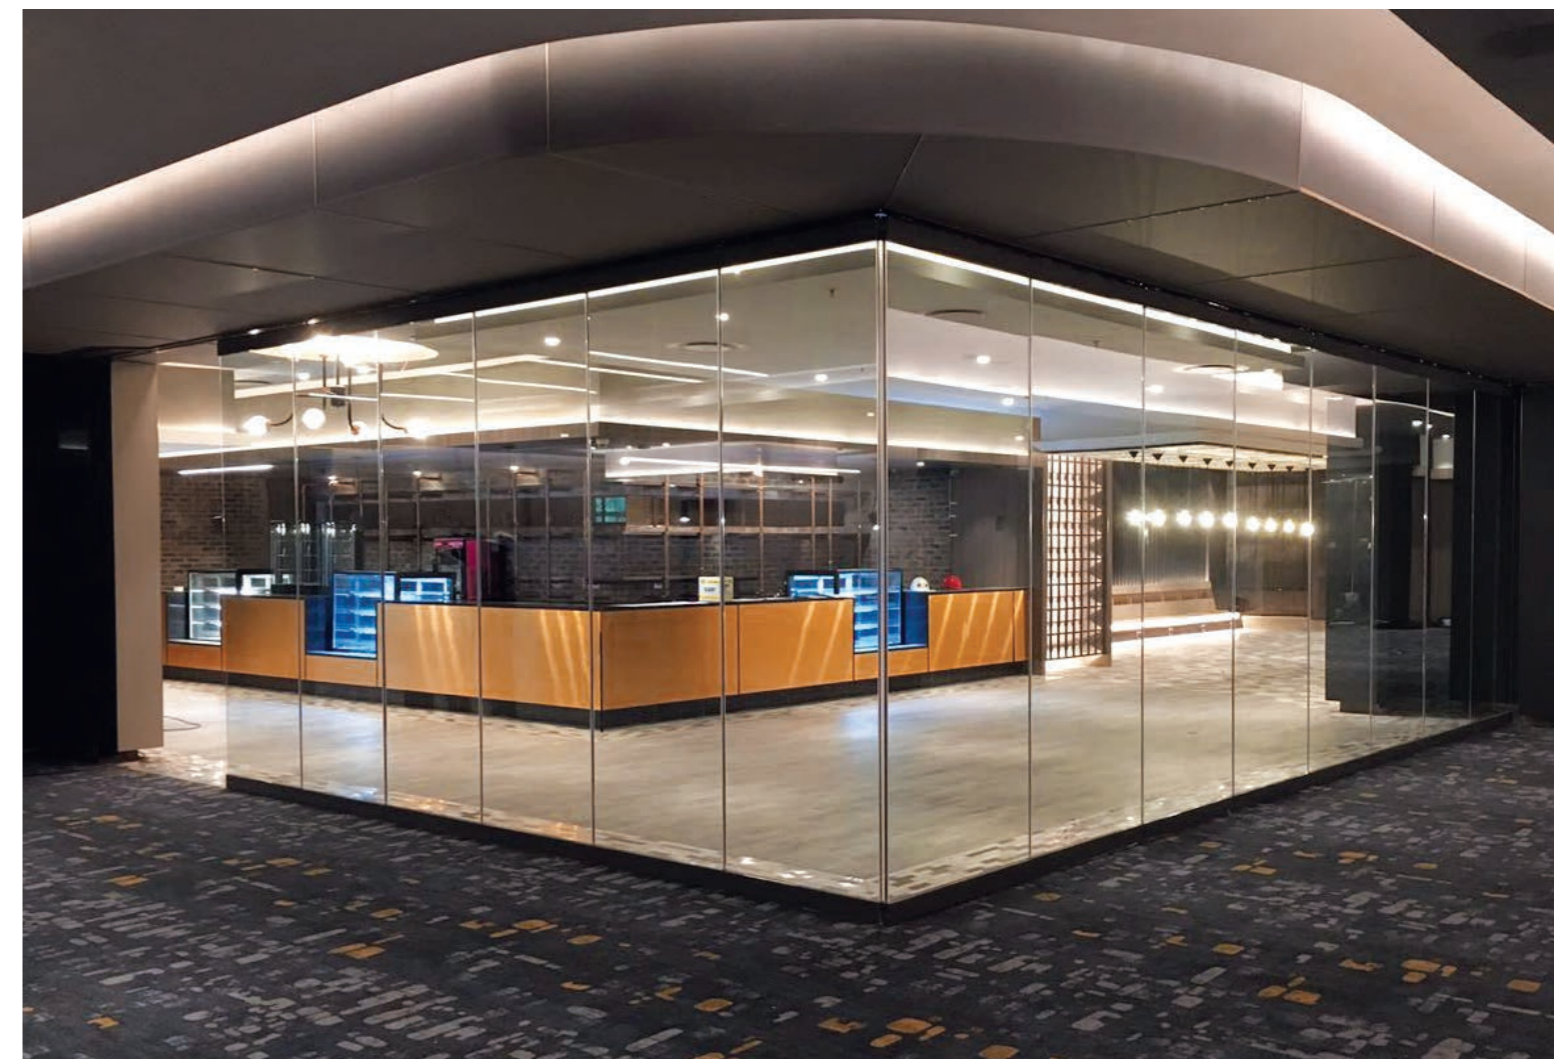

HOW TO SPECIFY



SELECT PRODUCT

Cooling Brothers VetroStax



SELECT THICKNESS

10 to 15mm Standard  
Custom Thickness Available



SELECT GLASS

Clear, Tinted, Low E, Low Iron



VetroStax

coolingbros.com.au | 56